

AURORA
BOREALE

Expand your Brightness



SCAN TO VISIT OUR
WEBSITE

www.ablighting.ae

ABTECH Lighting Solutions

AURA

DATASHEET AURL3

Recessed/Surface/Pendent Glow Light



AURA

AURL3



Description

AURL3 is a linear LED luminaire delivering uniform, glare-free illumination with a sleek architectural form for contemporary interior spaces.

Ideal for

- Office workstations and open-plan offices
- Meeting rooms and conference tables
- Educational and training spaces
- Retail and commercial environments
- Corridors and circulation areas
- Linear ceiling layouts and continuous lighting designs

Key Feature



- **Clean rectangular** design for modern architectural integration



- **Uniform opal diffuser** ensuring soft, glare-free light distribution



- **Surface & suspended** mounting flexibility for flexible installation



- **Extruded aluminum** body with premium finishing options



- **Wide customization** in length, power (200-100W), and CCT configurations

AURA

AURL3

Beam Angle

120°

IP

20

Life time

5


Years

Shape


Rectangular

CRI

>80/90

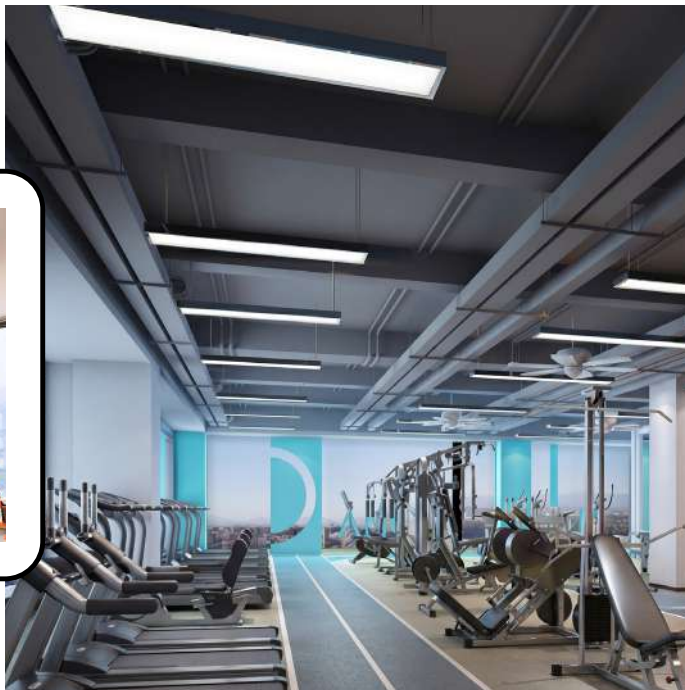

AURL3 Indicative Intensity Distribution Curve
Oval Luminaire | Opal PMMA | 120° Beam

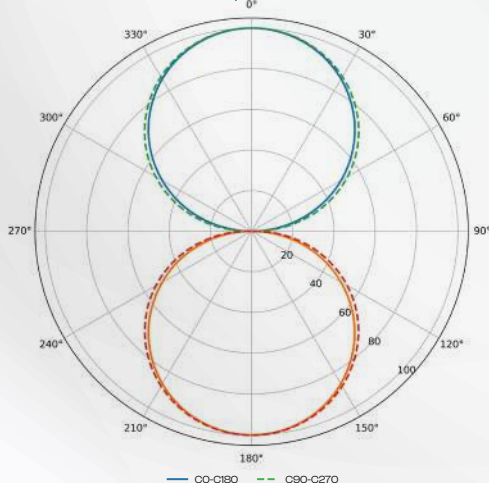

Voltage

220~240V

Diffuser

opal PMMA

Efficiency
lm/W

Up to **170 lumen/Watt**
from the light source

Dimming

On/Off, Dali, Phase Cut, 0-10V, 1-10V

Body Material

Extruded aluminum

Finishing Colors

White Black Silver


Mounting



Pendant




Surface



Recessed

CCT

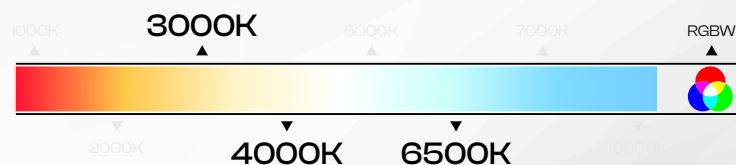

Led Brand | Driver Brand


TCI LED
professional led applications

TRIDONIC PHILIPS

AURA

AURL3

Dimension and Capacity

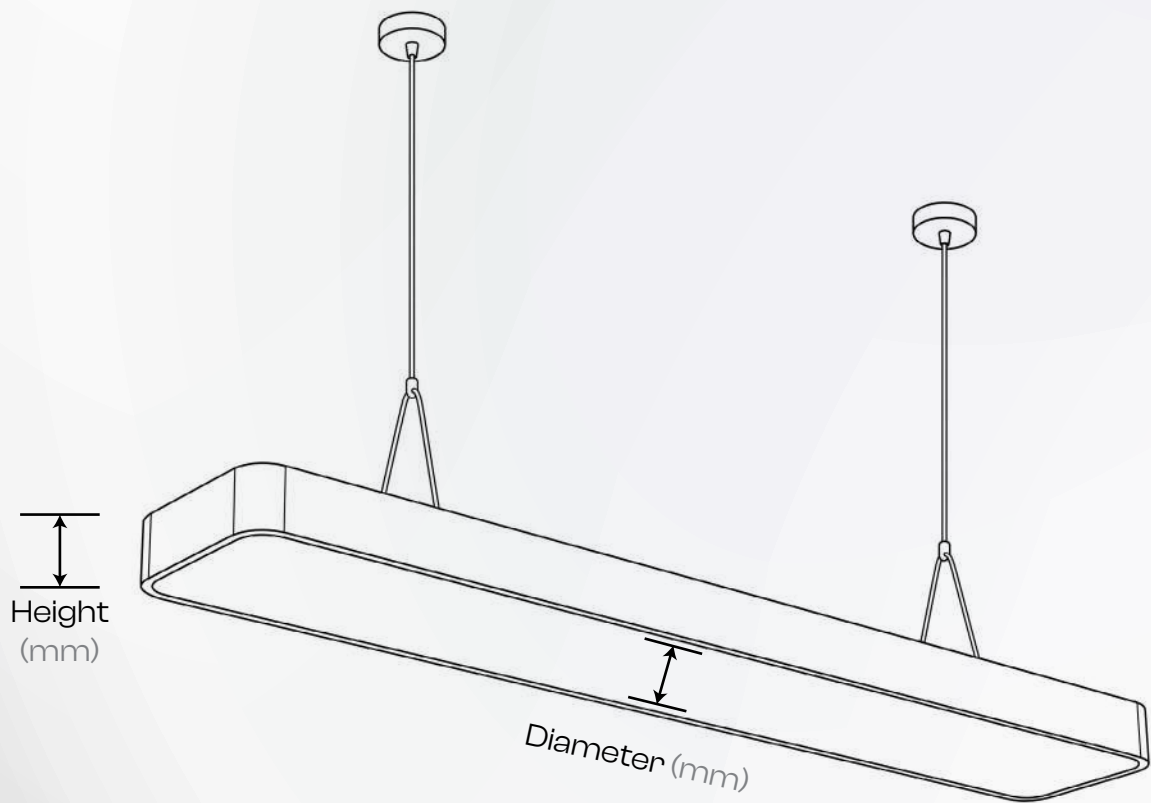

Height (mm)	Diameter (mm)	Power (Watt)	Driver Location
35	180 ~ 600	30 ~ 100	External
68	180 ~ 800	30 ~ 150	External
80	180 ~ 600	30 ~ 100	External
118	180 ~ 600	30 ~ 100	External

AURA

AURL3



Accessories



Recessed clips



Suspension kit



Surface clips



Pendent light base
(Optional)



AURORA BOREALE