

AURORA
BOREALE

Expand your Brightness



SCAN TO VISIT OUR
WEBSITE

www.ablighting.ae

ABTECH Lighting Solutions

TRIPROOF


DATASHEET Dual T8

LINEAR SYSTEM IP66



TRIPROOF

Dual T8

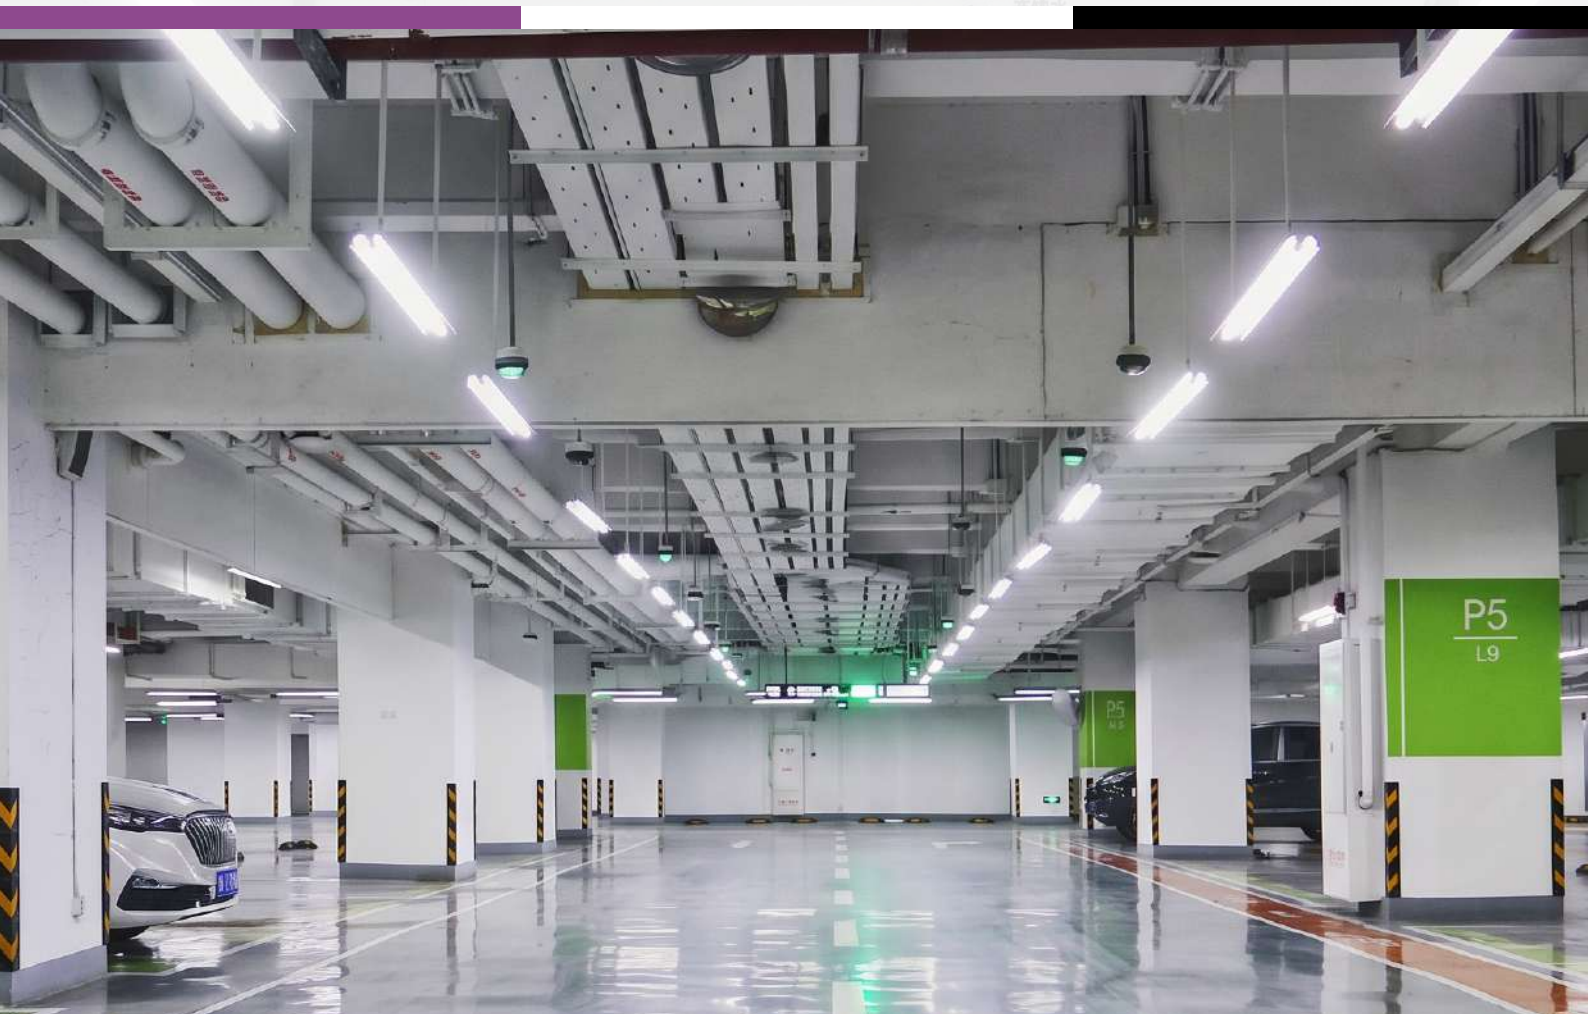

Description

Triproof linear luminaire designed for T8 tube configuration, offering durable protection and flexible lamp selection for industrial applications.

APPLICATIONS

- Warehouses and logistics areas
- Parking and underground areas
- Industrial and production facilities
- Utility and service areas
- Maintenance and service corridors
- Outdoor covered installations


Key Feature

- **Designed for dual T8 tube**
configuration (2 x T8)
- **No integrated driver**
required (lamp-based system)
- **Compatible with**
LED or fluorescent T8 lamps
- **High protection rating (IP66 / IK10)**
for harsh environments
- **Optional sensor**
for energy-saving control
- **Easy maintenance**
with replaceable light source
- **Durable polycarbonate**
housing with industrial-grade sealing
- **Stainless steel clips**
ensuring secure and corrosion-resistant installation
- **Ideal for**
retrofit and cost-sensitive applications

TRIPROOF

Dual T8

Dual T8
IP66

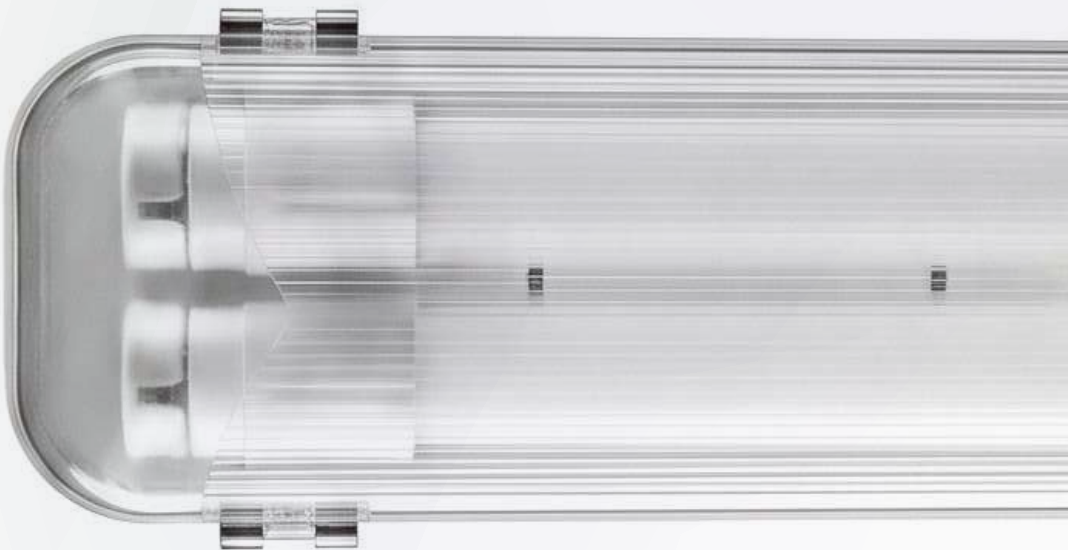

Input Voltage	AC 220-240V
Frequency	50/60 Hz
Power Factor	>0.9
Housing Material	Polycarbonate
Clips	Stainless Steel
Installation	Surface / Suspended
IP Rating	IP66
Impact Protection	IK10
Operating Temperature	-10°C to +45°C
Size	1260*95*80
Warranty	5 Years



AURORA BOREALE