D'AURORA BOREALE

Expand your Brightness


SCAN TO VISIT OUR **WEBSITE**

www.ablighting.ae

ABTECH Lighting Solutions

NILE

DATASHEET Recessed

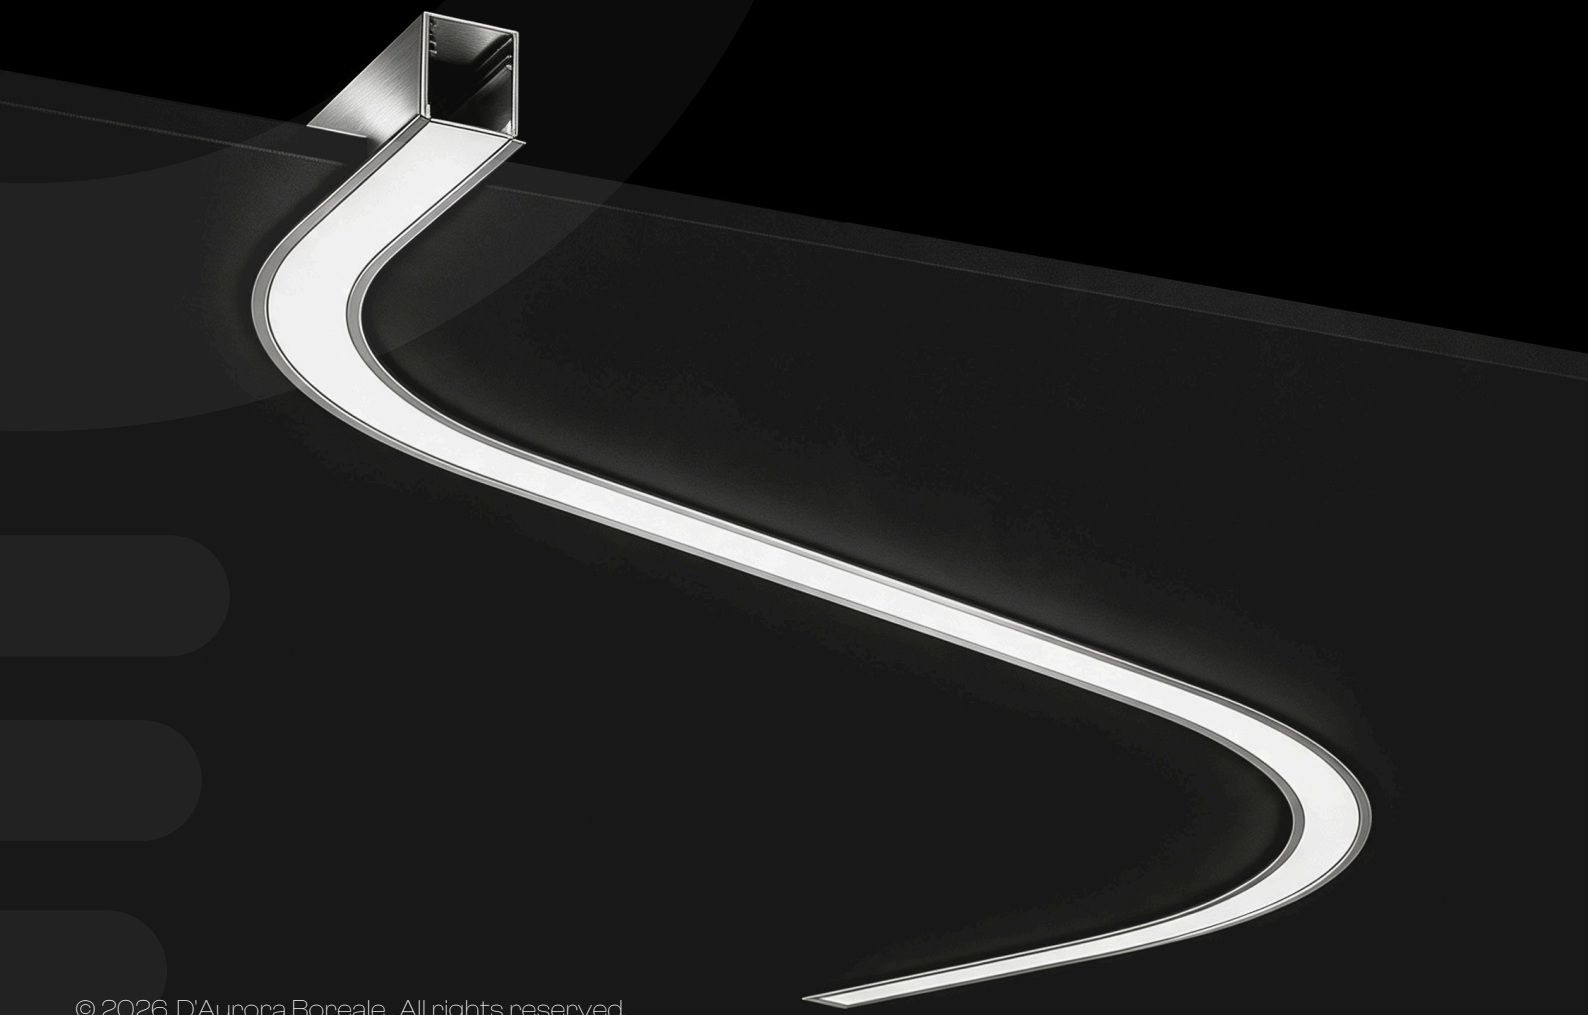

© 2026, D'Aurora Boreale . All rights reserved.

© 2026, D'Aurora Boreale . All rights reserved.

NILE

Recessed



Description


The recessed-with-trim Nile sets the light line flush into the ceiling with a visible trim flange framing the aperture. The body recesses above the ceiling while the flange covers the cut edge — no trimless plastering required. Like every Nile, it is a side-bend system: straight runs, curves and serpentine layouts are made to order, with the width configured per project.

© 2026, D'Aurora Boreale . All rights reserved.

NILE

Recessed

TECHNICAL SPECIFICATIONS

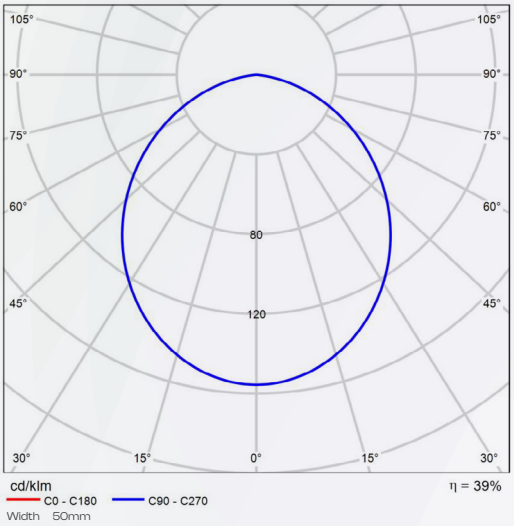

Field	Value
Model base	NILL2
Mounting	Recessed with trim
Section	Rectangular
Height	35 mm
Width	Made to order, 50-300 mm - width drives power and output
Bendable	side-bend
Finish	Silver
Power	table

Field	Value
Diffuser	Opal PMMA
Beam angle	120°
IP rating	IP20
CRI	≥80/90
CCT	3000 K / 4000 K / 6500 K
Input voltage	220-240 V AC
Driver	Tridonic . TCI . Philips
Control	On/Off . 1-10 V . 0-10 V . DALI . Phase-cut
Efficiency	Up to ~170 lm/W from the light source
Body	aluminium
Lifetime	50,000h

5 Years Warranty

D'AURORA
BOREALE

www.ablighting.ae