

D'AURORA
BOREALE

Expand your Brightness



SCAN TO VISIT OUR
WEBSITE

www.ablighting.ae

ABTECH Lighting Solutions


NILE

DATASHEET Recessed



NILE

Recessed

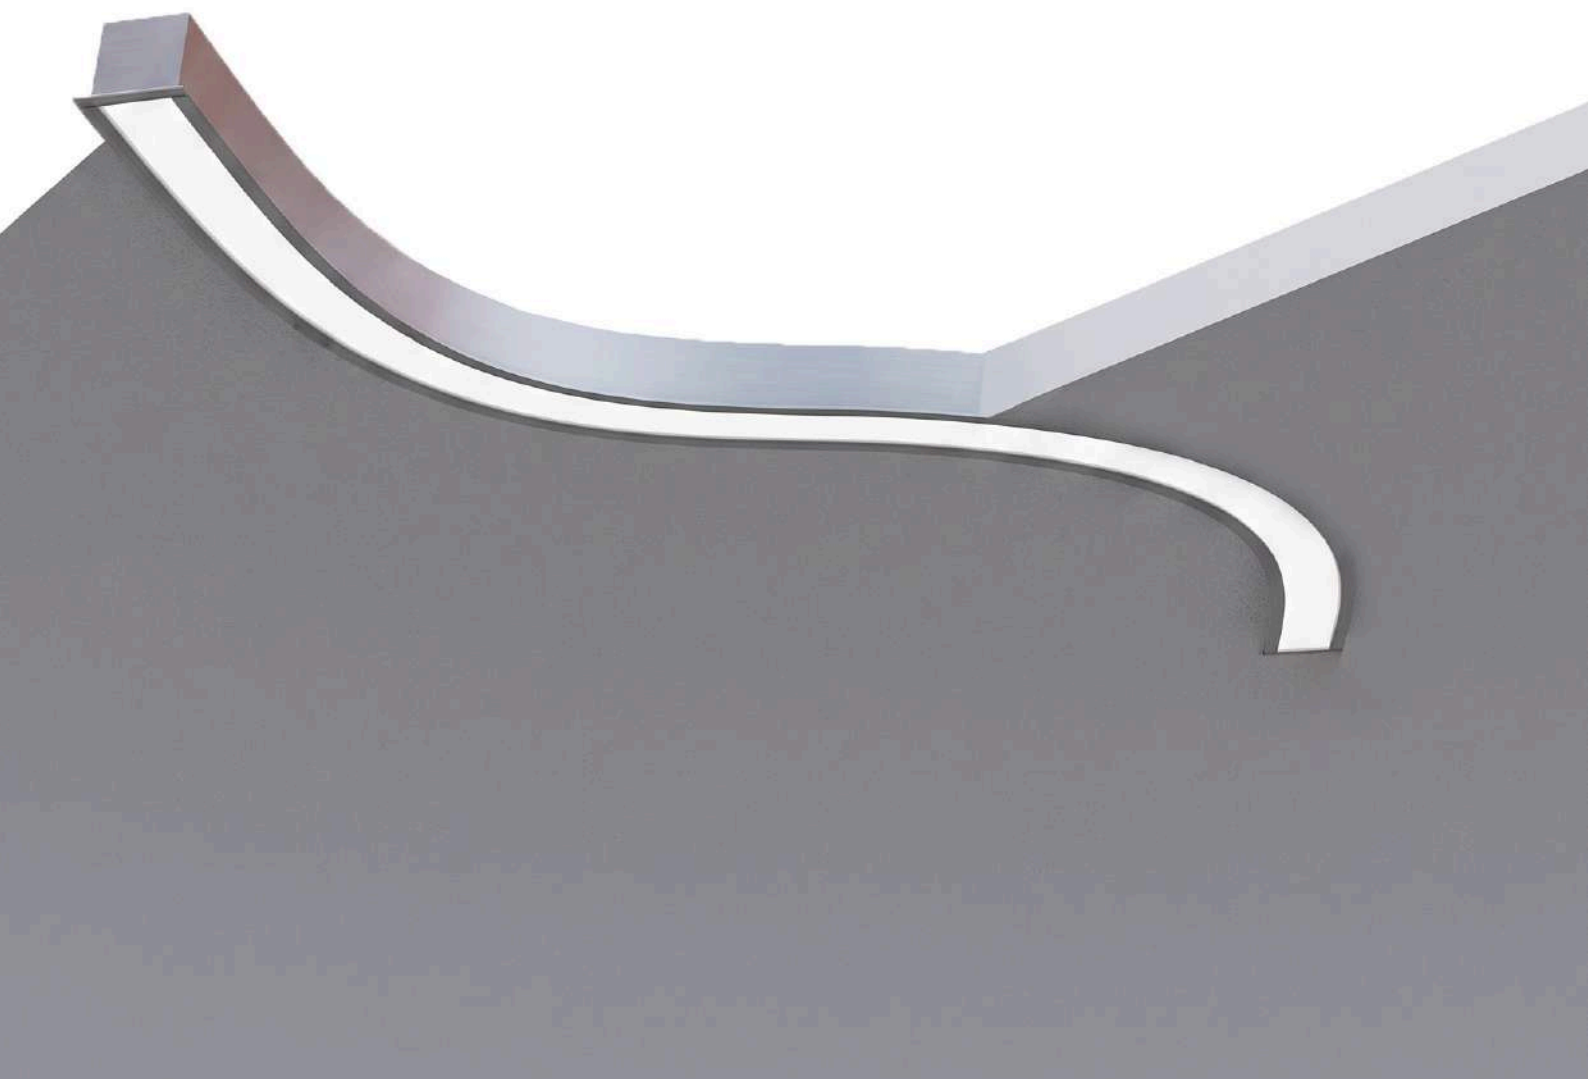

Description

The recessed-with-trim Nile sets the light line flush into the ceiling with a visible trim flange framing the aperture. The body recesses above the ceiling while the flange covers the cut edge — no trimless plastering required. Like every Nile, it is a side-bend system: straight runs, curves and serpentine layouts are made to order, with the width configured per project.

NILE

Recessed

TECHNICAL SPECIFICATIONS

Field	Value
Model base	NILL2
Mounting	Recessed with trim
Section	Rectangular
Height	35 mm
Width	Made to order, 50-300 mm - width drives power and output
Bendable	side-bend
Finish	Silver
Power	table

Field	Value
Diffuser	Opal PMMA
Beam angle	120°
IP rating	IP20
CRI	≥80/90
CCT	3000 K / 4000 K / 6500 K
Input voltage	220-240 V AC
Driver	Tridonic . TCI . Philips
Control	On/Off . 1-10 V . 0-10 V . DALI . Phase-cut
Efficiency	Up to ~170 lm/W from the light source
Body	aluminium
Lifetime	5 years



D'AURORA
BOREALE

