




[www.ablighting.ae](http://www.ablighting.ae)

ABTECH Lighting Solutions

# SPARTA


**DATASHEET** TRS-60

**Round Profile Ø60** LED strip light

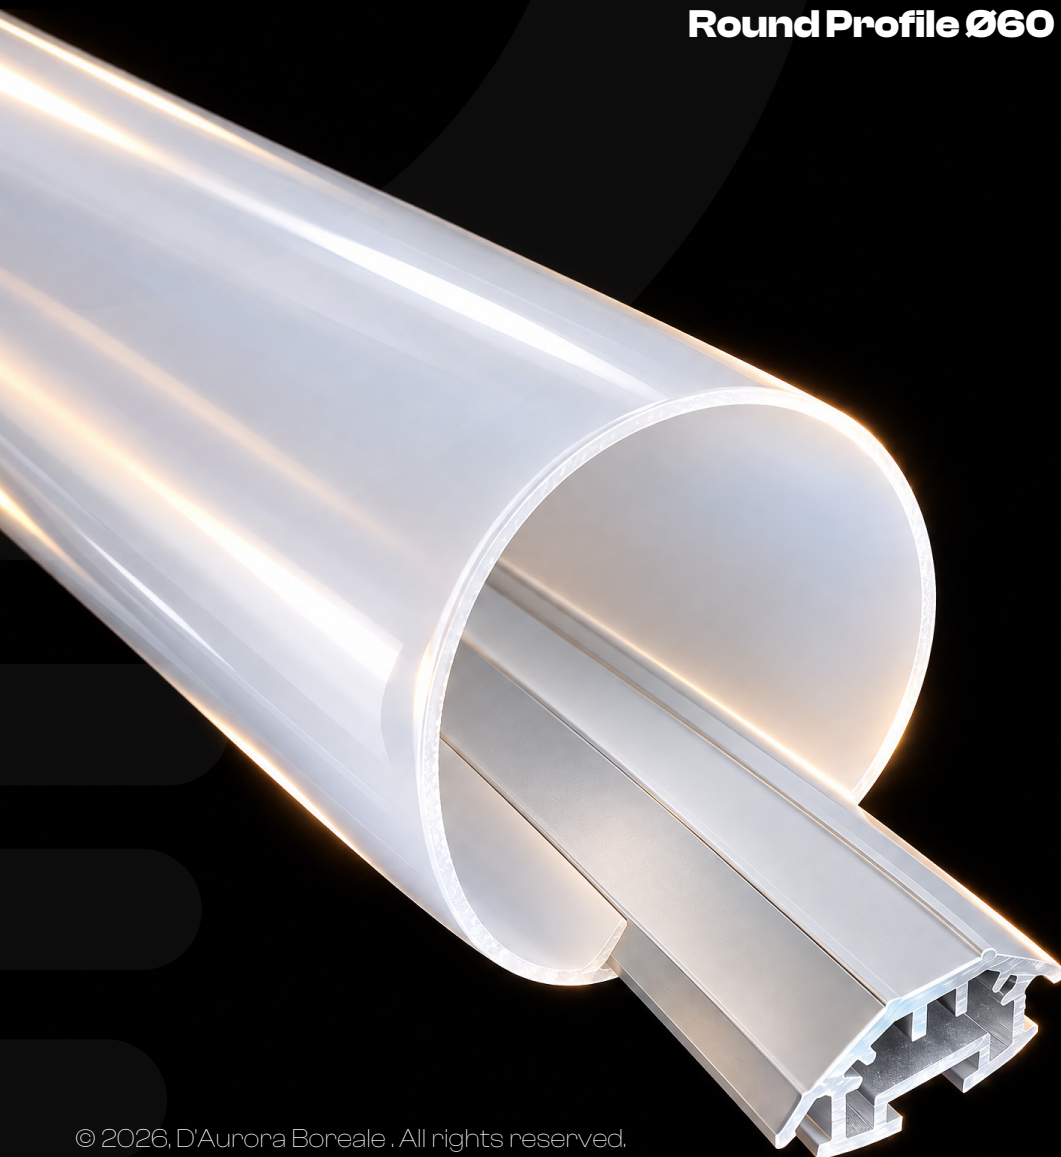

# SPARTA

## TRS-60

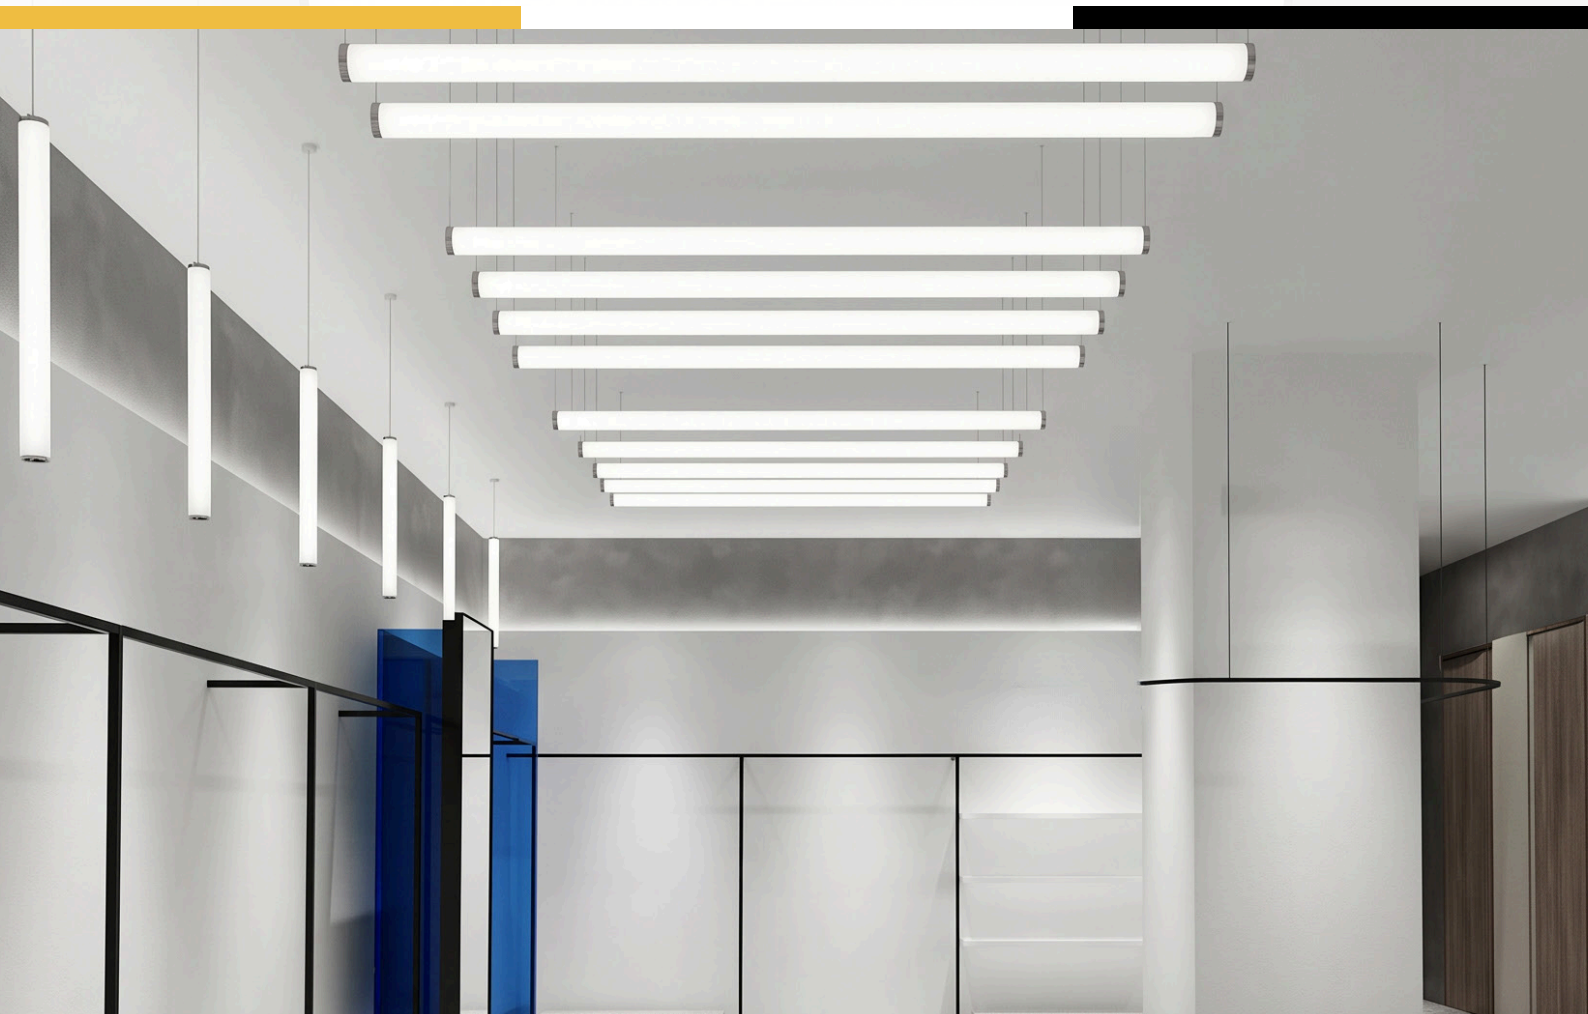

### Description

A round Ø60 mm suspended profile for LED strip, in the SPARTA linear light family. The extruded 6063 aluminium body carries an internal platform for LED strips under a frosted PC cover, closing with two end caps – one with a wire hole for the feed – to hang as a clean tubular light line. Stocked in 1 m to 4 m lengths, with customized lengths available.

### Design Capability


- Commercial lighting
- Indoor lighting
- Decorative lighting
- Suspended tubular strip runs in hospitality, retail and residential interiors.

### Key Feature

- **Round Ø60 mm section**  
slim tubular light line
- **Frosted PC cover**  
for a soft, diffused line
- **6063 aluminium**  
alloy body, anodized finish
- **Suspended installation**  
end cap with wire hole for the feed
- **Lengths 1 m • 2 m • 3 m • 4 m**  
customized length available
- **5-year warranty**  
**50,000h Lifetime**

# SPARTA

## TRS-60

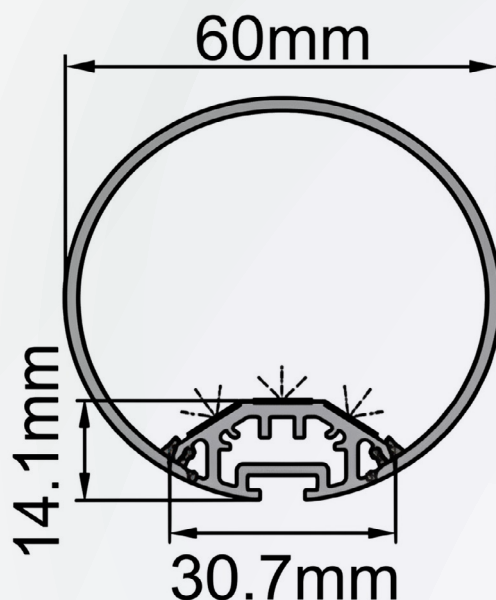

### TECHNICAL SPECIFICATIONS

| Parameter      | Value                                               |
|----------------|-----------------------------------------------------|
| Model          | TRS-60                                              |
| Family         | SPARTA - linear light profile                       |
| Section        | Round                                               |
| Outer diameter | Ø60.0 mm                                            |
| Body material  | 6063 T3-T8 aluminium alloy                          |
| Finish         | Anodized - white                                    |
| Cover          | PC, frosted                                         |
| Lengths        | 1 m . 2 m . 3 m . 4 m - customized length available |
| End caps       | 2                                                   |
| Installation   | Suspended                                           |

### INSTALLATION

- **Suspended installation.** One end cap carries a **wire hole** for the suspension/feed; the other is closed. Install clips are not applicable to this profile.
- The **frosted PC cover** closes the aperture; fit the two end caps to finish the run.



D'AURORA  
BOREALE

