D'AURORA BOREALE

Expand your Brightness

SCAN TO VISIT OUR WEBSITE

www.ablighting.ae

ABTECH Lighting Solutions

TRIPROOF

DATASHEET

LED - Selectable CCT With Sensor

LINEAR SYSTEM IP66



© 2026, D'Aurora Boreale . All rights reserved.

© 2026, D'Aurora Boreale . All rights reserved.

D'AURORA BOREALE

TRIPROOF

LED - Selectable CCT With Sensor



Description

High-performance triproof LED luminaire designed for harsh environments with flexible control, high efficiency, and long-term reliability.

APPLICATIONS

- Warehouses and logistics areas
- Parking and underground areas
- Industrial and production facilities
- Tunnels and infrastructure projects
- Utility and service areas
- Outdoor covered installations

Key Feature

- **Integrated LED system** for high efficiency and consistent performance
- **High protection rating (IP66 / IK10)** for harsh environments
- **Compatible with** premium drivers (TCI / Tridonic / Philips)
- **Supports DALI** and smart control integration
- **Optional built-in sensor** for energy-saving automation
- **Selectable CCT option** for flexible project requirements
- **Durable polycarbonate** housing with industrial-grade sealing
- **Stainless steel clips** ensuring secure and corrosion-resistant installation
- **Designed for** continuous and large-scale installations


© 2026, D'Aurora Boreale . All rights reserved.

D'AURORA BOREALE

TRIPROOF

LED - Selectable CCT With Sensor

Size	Power	Output
4ft	40W	6000 lm

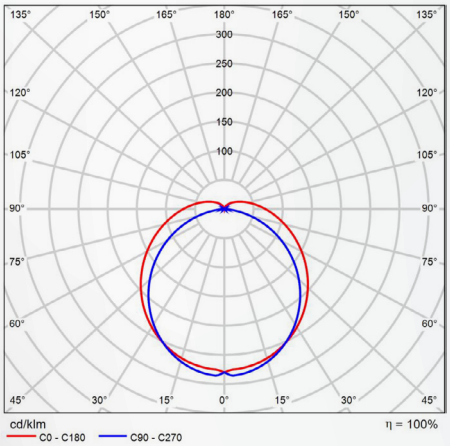




Driver Brands

TCI LED professional led applications TRIDONIC PHILIPS

Input Voltage	AC 220-240V
Frequency	50/60 Hz
Power Factor	>0.9
CRI	≥80
Beam Angle	120°
Housing Material	Polycarbonate
Clips	Stainless Steel
Installation	Surface / Suspended
IP Rating	IP66
Impact Protection	IK10
Operating Temperature	-10°C to +45°C
Dimming	(ON/OFF) / DALI / Sensor
Lifetime	Up to 50,000 hours
Warranty	5 Years

CCT (Selectable)

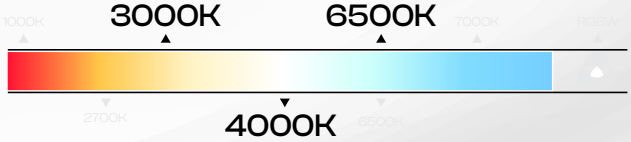

D'AURORA
BOREALE

www.ablighting.ae